




EV CHARGER

US/EU STANDARD

มาตรฐานของ US/EU สำหรับเครื่องชาร์จรถยนต์ไฟฟ้า
Ladegeräte für Elektroautos USA/EU Standard

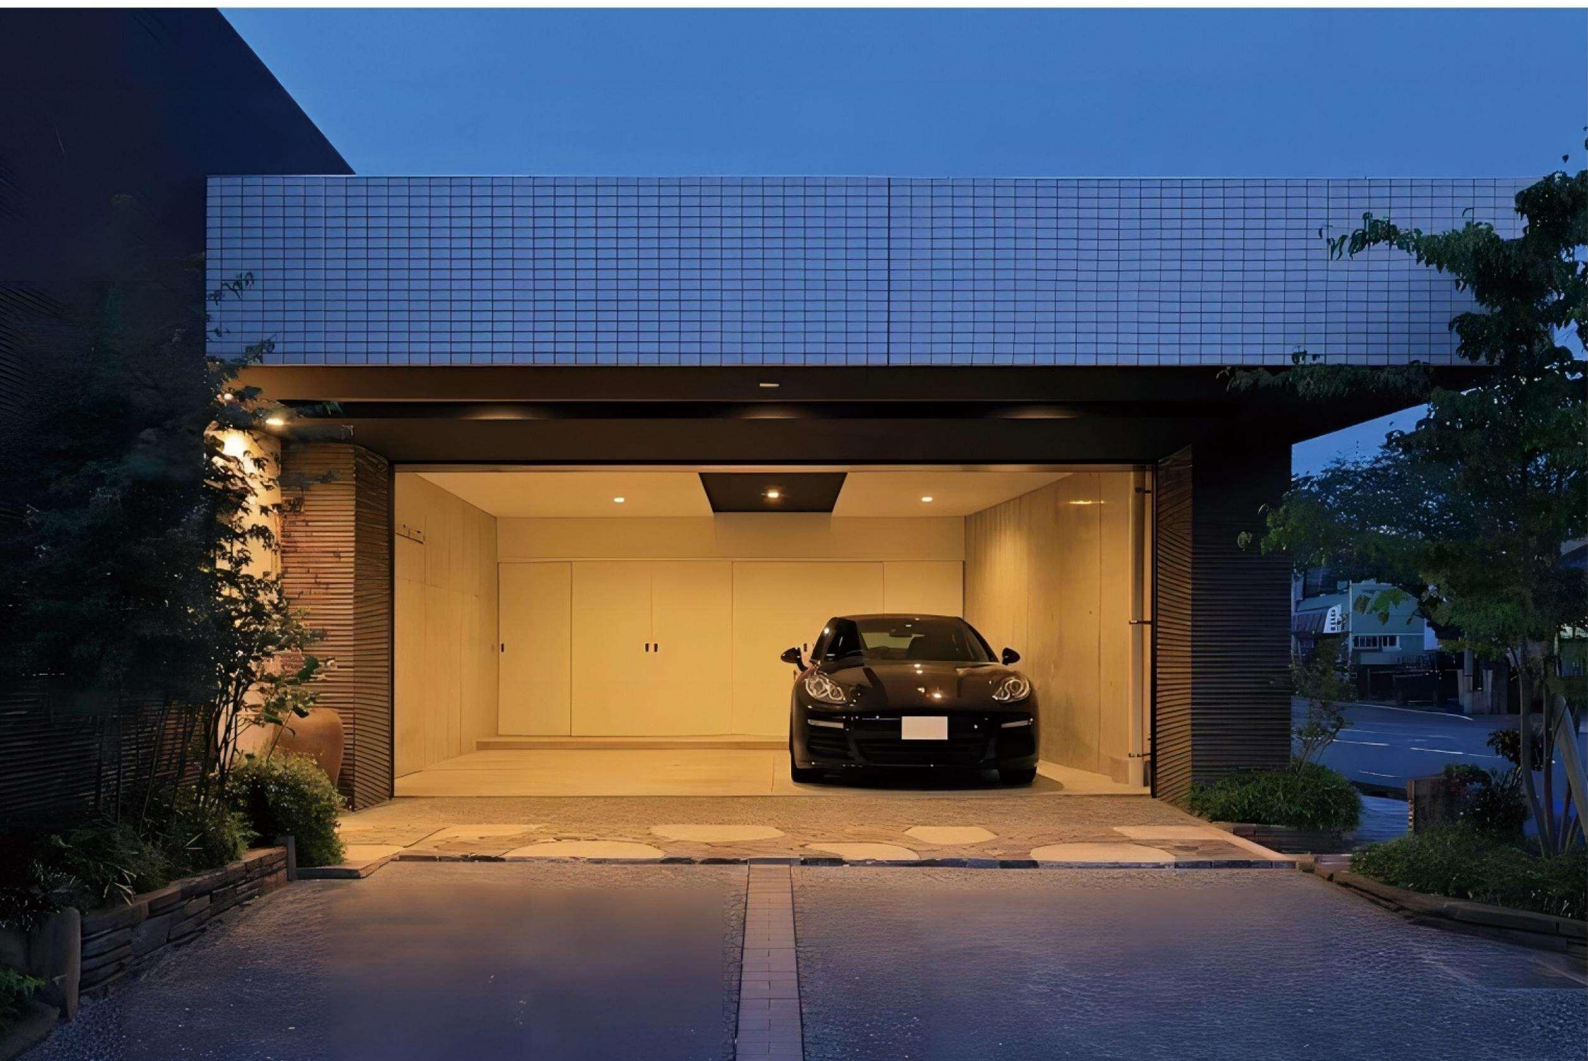

Wall Mounted DC EV Charger

Wandmontiertes DC-EV-Ladegerät


20KW

FEATURES

- Smooth panel design, beautiful and generous.
- Suitable for home and commercial use.
- Super wide constant power output voltage.
- Smart light information.
- Temperature controlled fan speed, lower noise.
- Smart charging and load balancing.
- High protection for complex environment.



INPUT	Power supply	3P+N+PE
	Voltage	400VAC±15%
	Frequency	50Hz/60Hz
OUTPUT	Voltage	150 ~ 1000VDC
		Constant power voltage : DC300V-1000V
	Max current	66A
	Rated power	20kW
USER INTERFACE	Charge plug	CCS1 / CCS2
	Cable length	5m (Optional)
	Enclosure	Galvanized Steel
	LED indicator	Green/Yellow/Red/Blue
	LCD display	NO
	RFID	Non-contact (ISO/IEC14443 A)
	Start method	QR-code/ Card/ Plug and Charge
COMMUNICATION	User Interface	Ethernet/4G(Optional)
	Protocol	OCPP1.6J
ELECTRICAL	Efficiency	≥95% (Half load and above)
PERFORMANCE	Power factor	≥0.99 (Rated load)
	Voltage Accuracy	≤±0.5%
	Current Accuracy	≤±1%
SAFETY	Meter Accuracy	DC METER/ On-Board Metering , 1.0
	Emergency stop	Yes
	Protection grade	IP54 and IK10
	Electrical protection	Over-current, Leakage, Short Circuit, Grounding, Lightning, Under-voltage,Over-voltage and Over-temperature
	Standard	EN/IEC 61851-1,EN/IEC 61851-23,IEC 61851-24,EN/IEC 61851-21-1
WORKING	Installation	Wall mounted/ Ground standing (Optional with pedestal)
ENVIRONMENT	Cooling	Fan cooling
	Working Temperature	-30°C ~ +50°C
	Humidity	5%~95% RH, Non-condensation
	Altitude	≤2000m
PACKAGE	Product size	430*210*650mm (W*D*H)
	Package size	916*646*408mm (L*W*H)
	Net weight	35kg
	Gross weight	47kg
	Packaging material	Wooden box

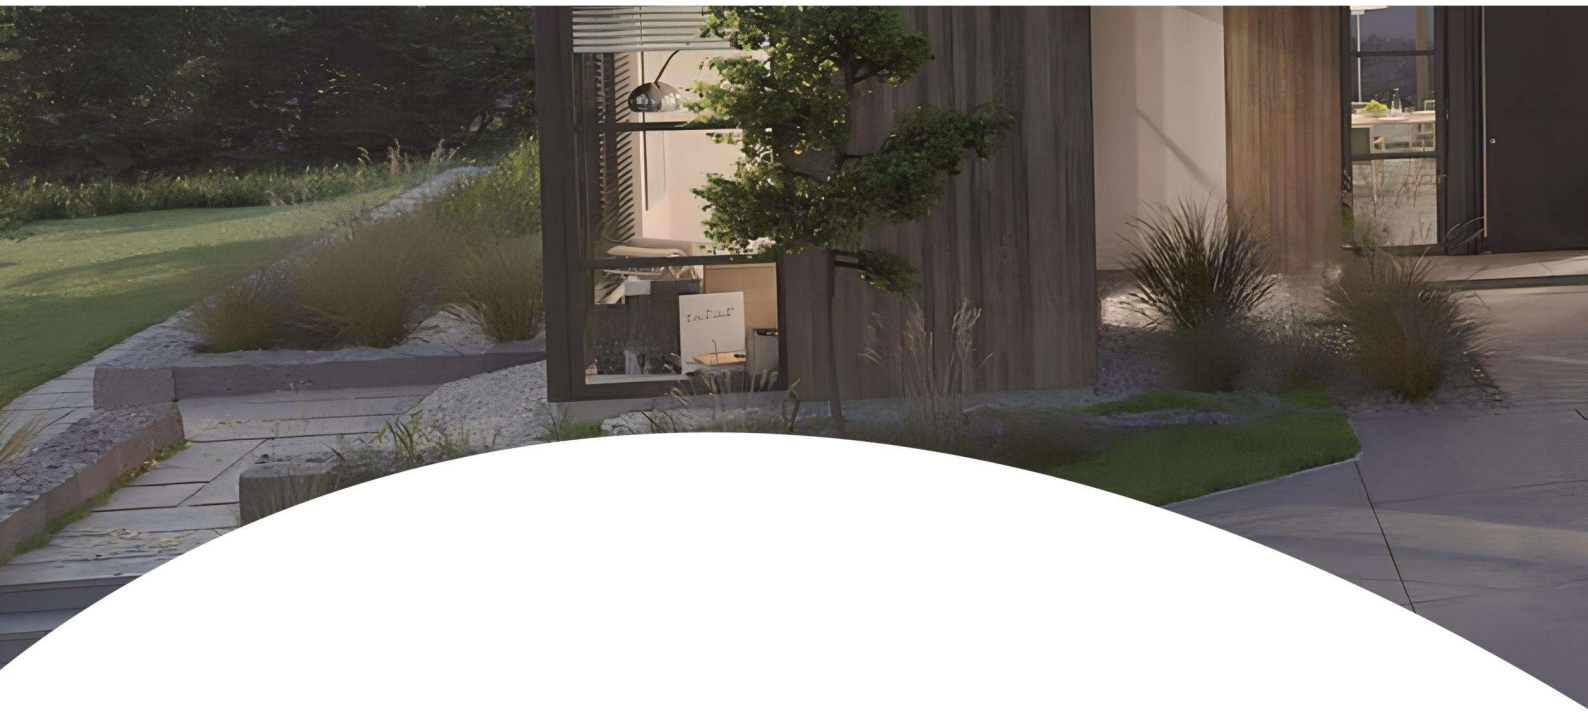

TEL: +86 5922237280
MOB: +86 18059289868
WEB: www.marsrock.com.cn
marsrock@marsrock.com.cn